

LINE | PLANKS & TILES

Bio-polyurethane based Resilient Flooring



WINEO PURLINE IS AN ENTIRELY NEW CLASS OF FLOORING PRODUCED WITH NATURAL RAW MATERIALS.



- 1 Clear Polyurethane
 Top Layer
- Décor PaperPrint Design
- Glass Fiber Reinforcement
 Dimensional Stability Layer

- Solid Bio-Polyurethane
 Base Layer
- Fleece TEC System®
 Fleece backing allows for simple, trouble-free installation

wineo PURline is made with plant-based oils and naturally occurring mineral components.

The ingredients are combined to create an extremely dense bio-polyurethane that is non-porous, stain resistent and durable.







WINEO PURLINE IS FLOORING REINVENTED.



PURline is not LVT; it's a completely new type of flooring. 5x more durable than vinyl flooring products, PURline stands up to wear and tear, easily.



PURline's proprietary bio-polyurethane creates healthier environments, naturally.



PURline is the only flooring that can endure the extreme demands of healthcare, hospitality, retail and public buildings, beautifully.

With unparalleled environmental credentials.











WHITE MARBLE



GOLDEN PINE MIXED



QUEEN'S OAK AMBER



ISLAND MOON OAK

GARDEN OAK





VILLAGE OAK BROWN



ROYAL CHESNUT DESERT

10 | WINEO PURLINE PLANKS & TILES

QUEEN'S OAK PEARL



CLASSIC OAK SUMMER



JUST CONCRETE



VILLAGE OAK GREY

WOOD XS ~ 4" × 24"









Pure White Pure Black

Garden Oak Island Oak Moon

WOOD L ~ 8" x 48"









Wild Wood

Supreme Oak Natural

Uptown Pine

Classic Oak Spring









Canyon Oak Sand

Canyon Oak Honey

Classic Oak Summer

Noble Elm









Classic Oak Autumn

Golden Pine Mixed

Pure Pine

Polar Pine










Silver Pine Mixed

Supreme Oak Silver

Classic Oak Winter

Supreme Oak Grey

WOOD XL ~ 10" × 59"

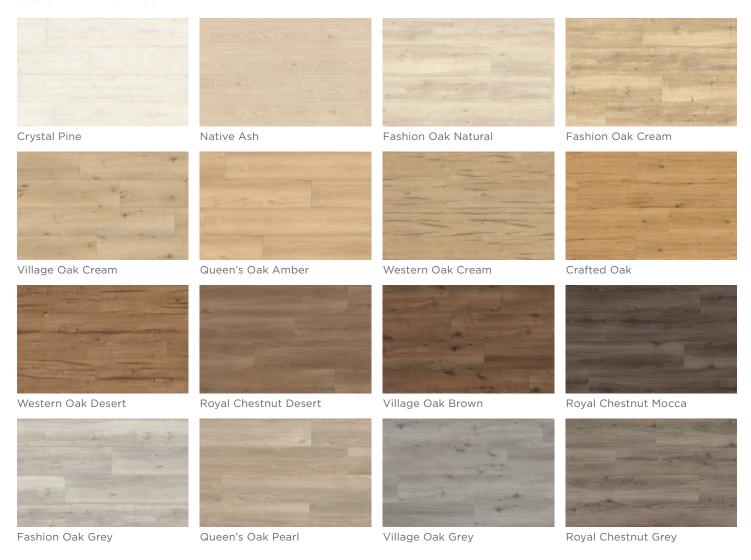

STONE XL ~ 20" × 39"





















Specifications



Material	Heterogeneous commercial floor covering consisting of bio-polyurethane (ecuran), glass fiber reinforcement, paper print layer, and clear PU top layer (This product contains no PVC)
Backing	FleeceTEC System®
Total Weight	0.74 lbs/sq ft
Sizes	Wood XS: ~ 4" x 24" Wood L: ~ 8" x 48" Wood XL: ~ 10" x 59" Stone XL: ~ 20" x 39"
Overall Thickness	2.5 mm
Sound Transmission (ASTM E2179)	Δ (Delta) IIC 7
Color & Light Stability (ASTM F1515 and F1514)	Δ (Delta) E value of <0.1 with <0.8 being required
Burning Characteristics (ASTM E648 and E662)	Meets Class 1
Static Load (ASTM F970)	Exceeds requirement at 1450 psi
Warranty	10 Years

For CSI specifications and the most up-to-date documentation, please visit our website at purline-contract.com.

ecuran is made with bio-polyurethane manufactured with plant-based oils and mineral components.



wineo

800-628-7462 | purline-contract.com

© 2021 Matter Surfaces. All rights reserved.

Declare.

PURLINE Resilient Polyurethane Floor Covering Windmöller GmbH

Final Assembly: Detmold, Germany Life Expectancy: 20 Years End of Life Options: Landfill (100%)

Ingredients:

Polymer: Polyurethane; Filler: Calcium Carbonate, Zeolite; Flame Retardant: Aluminum Hydroxide; Additives and Decor Paper Dyes: Undisclosed (0.5-1.0%); Foam Regulator: White Oil; Nonwoven: Polypropylene, Polyester, Glass; Decor Paper: Cellulose; Decor Paper Filler: Kaolin; Decor Paper Pigment: Titanium Dioxide

¹LBC Temp Exception IIO-E4 Proprietary Ingredients <1%

Living Building Challenge Criteria:

WDM-0001 VOC Content: N/A Third Party Verified

EXP. 01 JAN 2021
VOC Emissions: CDPH Compliant
LBC Red List Free
LBC Compliant
Declared

INTERNATIONAL LIVING FUTURE INSTITUTE de