

PRODUCT CODE

- NADCM-PS-80, box of sheets to cover 80 sf
- NADCM-PS-150, roll to cover 150 sf

PRODUCT DESCRIPTION


The TCNA-tested DCM-PRO Peel-and-Stick Membrane can be installed directly onto clean plywood and concrete subfloors without thinset. The patented DCM-PRO design allows for more adhesive to cable contact ultimately distributing heat faster and more evenly. There is no waiting required after installation so you can begin laying the flooring immediately. The DCM-PRO Membrane is ready to tile.

For ease, installers can cut the membrane to size, peel back the protective film, and stick the membrane directly onto a plywood or concrete subfloor. Installers can use either modified or unmodified adhesives over the membrane to suit their installation needs. The DCM-PRO Peel-and-Stick Membrane can also be covered with self-levelling mortars (SLU's) to allow installation of small format tiles and other floor types such as glue-down wood and LVT's, to be laid on top of the DCM-PRO System. The unique design of the DCM-PRO Membrane protects the cable from installation damage, reducing the risk of cable failure.

The DCM-PRO Peel-and-Stick Membrane has been successfully tested to ANSI 118.12 standards and performed well on the Robinson test (ASTM C-627). It is the highest-rated membrane for floor heating systems and the first of it's kind to adhere without the use of thinset.

FEATURES

- Under 6mm – 1/4" thick
- Rated as Anti-Fracture membrane as tested by the TCNA against ASTM 118-12
- Installs directly to subfloor, without thinset
- Ready to tile over
- Use any adhesives or SLU's on top for flooring installations
- Highest heating outputs with DCM-PRO Cable
- Lowest running costs with 1/4" Warmup Insulation Boards (WSC-0725)

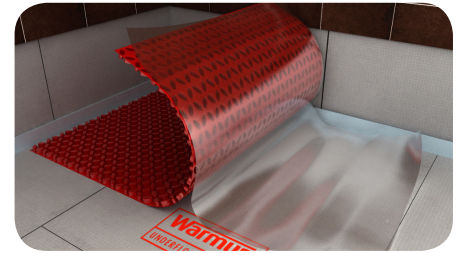

APPLICATION

The DCM-PRO Peel-and-Stick Membrane can be installed directly over a clean plywood or concrete subfloor without thinset. For OSB subfloors or other uneven subfloors, a primer may be required to improve bonding.

Always follow installation instructions and shop-vac/wet-mop the subfloor for effective bonding.

The Warmup DCM-PRO Cable can be installed at 2, 3 or 4 pgs to achieve the desired heat output. See following chart.



The world's best-selling electric floor heating brand™

DCM-PRO PEEL-AND-STICK MEMBRANE SUBMITTAL SHEET WSC - 1001

PRODUCT LISTING

DCM-PRO PEEL-AND-STICK MEMBRANE

Code	Description	Dimensions
NADCM-PS-80	Box of 10 sheets, covering 81.6sqft in total.	3'3" x 2'7"
NADCM-PS-150	Roll of membrane, covering 150 sqft in total.	3'3" x 47'2"

DCM-PRO CABLE

	PRODUCT CODE	Cable length (ft)	Amps	Membrane spacing			Loose laid cable w/ spacers	
				2 pegs	3 pegs	4 pegs	3"	4"
120 Volt	NADCM-C-120-65	16.7	0.5	3	5	7	4	6
	NADCM-C-120-130	33.1	1.1	7	10	13	8	11
	NADCM-C-120-195	49.9	1.6	10	15	20	12	17
	NADCM-C-120-260	66.3	2.2	13	20	27	17	22
	NADCM-C-120-325	83.0	2.7	17	25	33	21	28
	NADCM-C-120-390	99.4	3.3	20	30	40	25	33
	NADCM-C-120-525	132.9	4.4	27	40	53	33	44
	NADCM-C-120-655	166.0	5.5	33	50	67	42	55
	NADCM-C-120-785	199.1	6.5	40	60	80	50	66
	NADCM-C-120-920	232.3	7.7	47	70	93	58	77
	NADCM-C-120-1050	265.4	8.8	53	80	107	66	88
	NADCM-C-120-1180	298.6	9.8	60	90	120	75	100
	NADCM-C-120-1315	331.7	11.0	67	100	133	83	111
	NADCM-C-120-1445	364.8	12.0	73	110	147	91	122
	NADCM-C-120-1575	398.0	13.1	80	120	160	99	133
240 Volt	NADCM-C-240-325	83.0	1.4	17	25	33	21	28
	NADCM-C-240-390	99.4	1.6	20	30	40	25	33
	NADCM-C-240-525	132.9	2.2	27	40	53	33	44
	NADCM-C-240-655	166.0	2.8	33	50	67	42	55
	NADCM-C-240-785	199.1	3.3	40	60	80	50	66
	NADCM-C-240-920	232.3	3.9	47	70	93	58	77
	NADCM-C-240-1050	265.4	4.5	53	80	107	66	88
	NADCM-C-240-1180	298.6	5.0	60	90	120	75	100
	NADCM-C-240-1310	331.7	5.6	67	100	133	83	111
	NADCM-C-240-1640	414.7	7.0	83	125	167	104	138
	NADCM-C-240-1970	497.7	8.4	100	150	200	124	166
	NADCM-C-240-2300	580.7	9.8	117	175	233	145	194
	NADCM-C-240-2630	663.4	11.2	133	200	266	166	221
	NADCM-C-240-2955	746.4	12.6	150	225	300	187	249
	NADCM-C-240-3240	829.4	13.5	167	250	333	207	276

WARMUP INC.
USA: us@warmup.com
Tel.: 1-888-927-6333
www.warmup.com

CANADA: ca@warmup.com
Tel.: 1-888-592-7687
www.warmup.ca



The world's best-selling electric floor heating brand™



The world's **best-selling** electric floor heating brand™

DCM-PRO PEEL-AND-STICK MEMBRANE SUBMITTAL SHEET WSC - 1001

WARRANTY & MAINTENANCE

When installed according to the installation manual, the DCM-PRO System (DCM-PRO Cable + Peel-and-Stick Membrane) is covered by Warmup's Lifetime manufacturer warranty.

TECHNICAL SUPPORT

Warmup is available 24/7/365.

For quotes, layouts and specific technical information, contact us at:

Warmup USA

(888) 927-6333

us@warmup.com

Warmup CANADA

(888) 592-7687

ca@warmup.com

RELATED PRODUCTS

- 4iE® Smart Thermostat - see WSC-0926
- DCM-PRO Cable - see WSC-0816
- DCM-PRO Fleece-backed Membrane - see WSC-1026

