



Natural. Crafted. Responsible.  
Formerly HPVA®



# Environmental Product Declaration

Cradle-to-grave EPD for industry average engineered wood flooring products.



According to  
EN 15804  
ISO 21930  
ISO 14025





Photography by: Emily Hagopian  
Flooring Products: Nydree Flooring

Summary Results – Landfilling per m <sup>2</sup> Full Results in Tables 1-3		Cradle-to-Grave Total
Global Warming Potential, Total	kg CO <sub>2</sub> e	11.41
Global Warming Potential, Fossil	kg CO <sub>2</sub> e	39.33
Global Warming Potential, Biogenic	kg CO <sub>2</sub> e	-27.91
Ozone Depletion	kg CFC11e	7.4E-06
Acidification	kg SO <sub>2</sub> e	0.25
Eutrophication	kg Ne	0.25
SFP (Smog)	kg O <sub>3</sub> e	3.23
Non-renewable Energy	MJ, NCV	625.57

## 1.0 General Information

<b>EPD Program and Program Operator</b>	<p><b>ASTM International</b> 100 Barr Harbor Drive PO Box C700 West Conshohocken, PA, 19428-2959 USA <a href="http://www.astm.org">www.astm.org</a></p>  <p>ASTM INTERNATIONAL Helping our world work better</p>
<b>General Program Instructions and Version Number</b>	ASTM Program Operator for Product Category Rules (PCR) and Environmental Product Declarations (EPDs) - General Program Instructions, version: 6.0
<b>Manufacturer</b>	<p><b>Decorative Hardwoods Association</b> 42777 Trade West Dr Sterling, VA 20166 <a href="https://decorativehardwoods.org">https://decorativehardwoods.org</a></p>  <p>Natural. Crafted. Responsible. Formerly HPVA®</p> <p><b>National Wood Flooring Association</b> 111 Chesterfield Industrial Blvd. Chesterfield, MO 63005 <a href="https://nwfa.org">https://nwfa.org</a></p> 
<b>Declaration Number</b>	EPD 392
<b>Declared Product</b>	Engineered Wood Flooring
<b>Functional Unit</b>	1 m <sup>2</sup> of engineered wood flooring installed in a building for 75 years.
<b>Reference PCR and Version Number</b>	<p><b>ISO 21930:2017</b> Sustainability in Building Construction — Environmental Declaration of Building Products. [7]  <b>UL Environment:</b> Product Category Rules for Building-Related Products and Services  <b>Part A:</b> Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report, v3.2 [11]  <b>Part B:</b> Part B: Flooring EPD Requirements UL 10010-7</p>
<b>Markets of Applicability</b>	Construction Sector, Flooring

<b>Date of Issue</b>	25.11.2022		
<b>Period of Validity</b>	25.11.2027		
<b>EPD Type</b>	Industry Average EPD		
<b>EPD Scope</b>	Cradle-to-Grave		
<b>Year of reported manufacturer primary data</b>	2019		
<b>LCA Software</b>	SimaPro v8.5		
<b>LCI Databases</b>	USLCI [9], Ecoinvent 3.5 [15], Datasmart [8]		
<b>LCIA Methodology</b>	TRACI 2.1 [3]		
<b>The sub-category PCR review was conducted by:</b>	Jack Geibig, Chair Ecoform	Dr. Thomas Gloria Industrial Ecology Consultants	Thaddeus Owen
<b>LCA and EPD Developer</b> This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by:	<p><b>Athena Sustainable Materials Institute</b> 280 Albert Street, Suite 404 Ottawa, Ontario Canada K1P 5G8 <a href="http://www.athenasmii.org">www.athenasmii.org</a></p>   <p>James Salazar</p>		
<p>This declaration was independently verified in accordance with <b>ISO 14025:2006[4]</b>. The <b>UL Environment “Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report,” v3.2</b> (September 2018), based on <b>ISO 21930:2017</b> and <b>CEN Norm EN 15804 (2012)</b>, serves as the core PCR, with additional considerations from the <b>USGBC/UL Environment Part A Enhancement (2017)</b>.</p> <p style="text-align: center;"><input type="checkbox"/> INTERNAL                      <input checked="" type="checkbox"/> EXTERNAL</p>			
<b>Independent Verifier</b> This life cycle assessment was independently verified in accordance with ISO 14044 [6] and the reference PCR by:	<p><b>Tim Brooke</b> 100 Barr Harbor Drive PO Box C700 West Conshohocken, PA, 19428-2959 USA <a href="http://www.astm.org">www.astm.org</a></p>		
<p><b>Limitations</b></p> <ol style="list-style-type: none"> <li>1.0 Environmental declarations from different programs (ISO 14025) may not be comparable.</li> <li>2.0 Comparison of the environmental performance of Flooring Products using EPD information shall be based on the products use and impacts at the building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under this PCR.</li> <li>3.0 Full conformance with the PCR for Products allows EPD comparability only when all stages of the life cycle have been considered. However, variations and deviations are possible” Example of variations: Different LCA software and background LCI datasets may lead to different results for upstream or downstream of the life cycle stages declared.</li> </ol>			

LCA and EPD Manufacture Participants

About the Decorative Hardwoods Association

Founded in 1921, the Decorative Hardwoods Association, formerly known as Hardwood Plywood and Veneer Association, represents the hardwood plywood, hardwood veneer, and engineered hardwood flooring industries. Together we produce 90% of the hardwood plywood stock panels and hardwood veneer manufactured in North America. More information can be found at [decorativehardwoods.org](http://decorativehardwoods.org).

About the National Wood Flooring Association

The National Wood Flooring Association (NWFA) is an international not-for-profit trade association. The NWFA represents all segments of the wood flooring industry including manufacturers, distributors, retailers, installers, importers/exporters, inspectors, and consultants. The mission of the not-for-profit organization is to unify and strengthen the wood flooring community through technical standards, education, networking, and advocacy. NWFA accomplishes this through various programs and services, such as hands-on training, an annual Wood Flooring Expo, Hardwood Floors magazine, and technical standards and publications that are recognized worldwide. More information about NWFA can be found at [nwfa.org](http://nwfa.org).



## 2. PRODUCT DESCRIPTION

### Wood

Wood is the hard fibrous material that forms from the main substance of the trunk or branches and beneath the bark of a tree.

### Wood Flooring

A wood floor is any flooring product that contains real wood as the top-most, wearable surface of the floor. Wood floors come in many different options. These include, but are not limited to: hardwood/softwood, domestic/imported, solid/engineered, jobsite-finished/factory-finished, strip/plank/wide plank/parquet, newly harvested/antique reclaimed/recycled/salvaged, saw cut, grade, specie, length, thickness, profile, and finish type.

### Engineered Wood Flooring


Engineered wood flooring has a real wood wear layer that the consumer can see, touch, and experience. It normally is made using multiple wood veneers or slats of wood glued together under pressure at opposing directions, or a variety of composites for core material such as MDF. This study inventories a mix of engineered wood flooring products, and composite engineered wood flooring products made from wood-based composite platform materials. The thickness of the finished product can range from 3/8" to 3/4", and is available widely in all thicknesses. The thickness of the top wood veneer typically determines if an engineered wood floor can be sanded and refinished, and how many times. Wood flooring is classified as strip if it has a face width less than 3 inches, plank if it has a face width between 3 and 5 inches, and wide plank if it has a face width more than 5 inches. Parquet flooring is any pattern that is geometric in shape as opposed to linear. Herringbone, Chevron, and the traditional square-shaped finger-block pattern are examples of common parquet patterns. Figure 1 provides a visual representation of the product.

### U.S. Forests

In the United States, the most-common domestic hardwood species used to produce engineered wood flooring include red oak, white oak, hard (sugar) maple, hickory, pecan, cherry, birch, walnut, ash, and beech. Red oak and white oak are the dominant species in the U.S. hardwood forests, and therefore comprise the majority of engineered hardwood flooring production.

Studies show hardwood used to make flooring is harvested sustainably in the United States. In fact:

- Net annual growth in U.S. commercial hardwood forests exceeds harvest and mortality by 33% each year.
- The volume of U.S. hardwood growing stock increased by more than 130%, from 5.2 billion m3 in 1953 to 12 billion m3 in 2012.
- The total annual growth of U.S. hardwood species is just more than 272 million m3.
- Hardwoods generally are harvested selectively a few trees at a time, not using large clear-cutting processes.

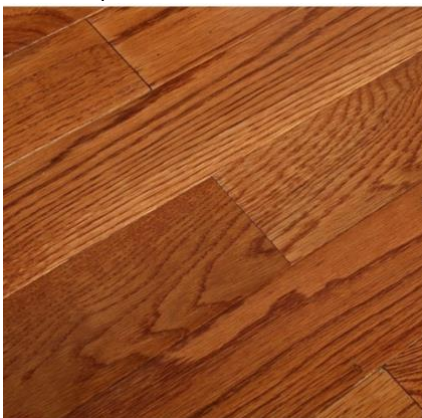

**Figure 1: Installed engineered hardwood flooring**

### 3. METHODOLOGY

The underlying LCA [5] investigates the lifecycle stages of engineered hardwood flooring production in the United States from cradle-to-grave with all modules included.

#### System Boundaries and Product Flow Diagram

The scope (Figure 2) covered resource extraction [A1], resource transportation [A2], and manufacturing of products [A3], transportation of products [A4], installation of products [A5], use [B1-B7], disposal at the end-of-life [C1-C4], and potential benefits [D] beyond system boundaries. All inputs (material, fuel, and energy), outputs (product and co-products), and direct emissions to air, water, and land were included in the development of LCI and LCIA. Indirect emissions from the consumption of materials were included in secondary datasets.

Building Life Cycle Information Modules																	
Production stage			Construction Stage		Use stage							End-of-life stage			Substitution Effects		
Extraction and upstream production	Transport to factory	Manufacturing	Transport to site	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	De-Construction/ Demolition	Transport to waste processing or disposal	Waste processing	Disposal	Benefits Outside System	
																	A1
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

Figure 2: Life Cycle Stages and Information Modules per ISO 21930:2017

#### Construction and Service Life Assumptions

The product system includes average assumptions as to the transportation of the product to the construction site, 167 miles [13] as well as construction energy use [2]. The reference service life for the product is 25 years which is the default specified by the UL Part A PCR [11]. The LCA report presents scenarios with and without vacuuming to show the significant results variability depending on the service life assumptions. This EPD presents the results for the 25-year service life assumption with no vacuuming. To access the data for the with vacuuming scenario please refer to the LCA report. [2]

#### Benefits Outside the System Boundary

Module D estimates the benefits outside the system boundary, natural gas displacement and the avoidance of producing plywood for future construction projects. To estimate natural gas displacement, we first calculated the potential fuel higher heating value of the product based on a higher heating value of 20.9 MJ/odkg [2]. The energy equivalent amount of natural gas was calculated based on a higher heating value of 38.66 MJ/m3 [9].

## Functional Unit

The functional unit for the product is “one square meter average engineered wood flooring installed in a building for 75 years”.

## Data Sources

Primary and secondary data sources, as well as the respective data quality assessment are documented in the underlying LCA project report [2] in accordance with UL PCR 2018.

## Treatment of Biogenic Carbon and Sustainable Forest Management Certification

Biogenic carbon emissions and removals are reported in accordance with ISO 21930 7.2.7. and 7.2.12. Detailed information is provided in Section 5.1 of the underlying LCA [2].

ISO 21930 requires a demonstration of forest sustainability to characterize carbon removals with a factor of -1 kg CO<sub>2</sub>e/kg CO<sub>2</sub>. ISO 21930 Section 7.2.11 Note 2 states the following regarding demonstrating forest sustainability: “Other evidence such as national reporting under the United Nations Framework Convention on Climate Change (UNFCCC) can be used to identify forests with stable or increasing forest carbon stocks.” The United States UNFCCC annual report Table 6-1 provides annual NET GHG Flux Estimates for different land use categories. This reporting indicates non-decreasing forest carbon stocks and thus the source forests meet the conditions for characterization of removals with a factor of -1 kg CO<sub>2</sub>e/kg CO<sub>2</sub>.

The Landfill Modeling for Biogenic Carbon is based on the United States EPA WARM model. The WARM model accounts for decomposition and emissions of landfill gas as a portion of the initial carbon in the product. WARM Model documentation: <https://www.epa.gov/warm/documentation-waste-reduction-model-warm>.

## 4. LCA Results

The results are presented for both the average end-of-life treatment, as well as individual scenarios for incineration with energy recovery and landfilling. The U.S. Environmental Protection Agency’s Materials Management Fact Sheet estimates 0% recycling, 18% combustion with energy recovery and 82% landfilling as the average end-of-life treatment for durable wood products; this average treatment was adopted.

The impact categories and characterization factors (CF) are from the U.S. EPA Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts -TRACI 2.1 [6]. SimaPro v8.5 [10] was used to accumulate the LCI data and to calculate the LCIA results.

The total primary energy consumption was based on Cumulative Energy Demand [18]. Lower heating value of primary energy carriers was used to calculate the primary energy values. Other inventory parameters concerning material use, waste, water use and biogenic carbon were drawn from the LCI results. ACLCA’s Guidance to Calculating non-LCIA Inventory Metrics was followed in accordance with ISO 21930:2017 [1].

Table 1 presents the cradle-to-gate results. Table 2 and Table 3 present results for 100% landfilling and 100% incineration respectively.

**Table 1: Cradle-to-gate Results for 1.0 m<sup>2</sup> of engineered wood flooring**

<b>Core Mandatory Impact Indicator</b>	<b>Indicator</b>	<b>Unit</b>	<b>A1-A3</b>	<b>A1</b>	<b>A2</b>	<b>A3</b>
Global warming potential – Total	GWP <sub>TOTAL</sub>	kg CO2e	6.849	-30.192	0.666	36.375
Global warming potential - Fossil	GWP <sub>FOSSIL</sub>	kg CO2e	6.849	0.215	0.666	5.968
Global warming potential - Biogenic	GWP <sub>BIOGENIC</sub>	kg CO2e	0.000	-30.407	0.000	30.407
Ozone depletion potential	ODP	kg CFC11e	1.13E-06	8.84E-12	2.54E-11	1.13E-06
Acidification potential of soil and water sources	AP	kg SO2e	0.040	0.003	0.004	0.033
Eutrophication potential	EP	kg Ne	0.030	0.000	0.000	0.029
Formation potential of tropospheric ozone	SFP	kg O3e	0.709	0.093	0.108	0.508
Abiotic depletion potential (ADP <sub>fossil</sub> )	ADP <sub>f</sub>	MJ, NCV	63.869	2.980	8.565	52.323
Fossil fuel depletion	FFD	MJ Surplus	5.907	0.444	1.276	4.187
<b>Use of Primary Resources</b>						
Renewable primary energy used as energy	RPRE	MJ, NCV	53.253	0.000	0.000	53.253
Renewable primary energy used as material	RPRM	MJ, NCV	31.494	31.494	0.000	0.000
Non-renewable primary energy used as energy	NRPRE	MJ, NCV	91.732	2.876	8.604	80.253
Non-renewable primary energy used as material	NRPRM	MJ, NCV	0.000	0.000	0.000	0.000
<b>Secondary Material, Secondary Fuel and Recovered Energy</b>						
Secondary material	SM	kg	0.00	0.00	0.00	0.00
Renewable secondary fuel	RSF	MJ, NCV	39.208	0.000	0.000	39.208
Non-renewable secondary fuel	NRSF	MJ, NCV	0.00	0.00	0.00	0.00
Recovered energy	RE	MJ, NCV	0.00	0.00	0.00	0.00
<b>Mandatory Inventory Parameters</b>						
Consumption of freshwater resources	FW	m <sup>3</sup>	0.007	0.005	0.000	0.001
<b>Indicators Describing Waste</b>						
Hazardous waste disposed	HWD	kg	0.002	0.000	0.000	0.002
Non-hazardous waste disposed	NHWD	kg	0.127	0.006	0.000	0.122
High-level radioactive waste	HLRW	m <sup>3</sup>	3.06E-09	1.08E-09	2.68E-11	1.95E-09
Intermediate- and low-level radioactive waste	ILLRW	m <sup>3</sup>	1.58E-10	9.74E-12	1.29E-10	1.89E-11
Components for re-use	CRU	kg	0.00	0.00	0.00	0.00
Materials for recycling	MR	kg	0.00	0.00	0.00	0.00
Materials for energy recovery	MER	kg	0.00	0.00	0.00	0.00
Recovered energy exported	EE	MJ, NCV	0.00	0.00	0.00	0.00



**Table 2: Cradle-to-Grave Results for 1.0 m<sup>2</sup> of engineered wood flooring – Landfilling End-of-Life Treatment**

Core Mandatory Impact Indicator	Indicator	Unit	A-C	A-D	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4, Landfill	D, Landfill
Global warming potential – Total	GWP <sub>TOTAL</sub>	kg CO2e	11.41	11.41	-4.87	0.48	0.15	0.00	12.26	3.28	-2.70	0.00	0.00	0.00	0.00	0.10	0.00	2.71	0.00
Global warming potential - Fossil	GWP <sub>FOSSIL</sub>	kg CO2e	39.33	39.33	6.85	0.48	0.15	0.00	12.26	3.28	15.91	0.00	0.00	0.00	0.00	0.10	0.00	0.29	0.00
Global warming potential - Biogenic	GWP <sub>BIOGENIC</sub>	kg CO2e	-27.91	-27.91	-11.72	0.00	0.00	0.00	0.00	0.00	-18.61	0.00	0.00	0.00	0.00	0.00	0.00	2.41	0.00
Depletion potential of the stratospheric ozone layer	ODP	kg CFC11e	7.4E-06	7.4E-06	1.1E-06	8.1E-10	9.1E-10	0.0E+00	1.6E-06	2.5E-06	2.3E-06	0.0E+00	0.0E+00	0.0E+00	0.0E+00	1.6E-10	0.0E+00	3.9E-09	0.0E+00
Acidification potential of soil and water sources	AP	kg SO2e	0.25	0.25	0.04	0.00	0.00	0.00	0.09	0.02	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Eutrophication potential	EP	kg Ne	0.25	0.25	0.03	0.00	0.00	0.00	0.03	0.01	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
Formation potential of tropospheric ozone	SFP	kg O3e	3.23	3.23	0.71	0.08	0.01	0.00	0.55	0.17	1.71	0.00	0.00	0.00	0.00	0.02	0.00	0.01	0.00
Abiotic depletion potential (ADP <sub>fossil</sub> )	ADPf	MJ, NCV	493.18	493.18	63.87	6.06	1.48	0.00	123.66	148.22	148.31	0.00	0.00	0.00	0.00	1.22	0.00	0.37	0.00
Fossil fuel depletion	FFD	MJ Surplus	58.78	58.78	5.91	0.91	0.07	0.00	15.51	21.90	14.24	0.00	0.00	0.00	0.00	0.18	0.00	0.05	0.00
<b>Use of Primary Resources</b>																			
Renewable primary energy used as energy	RPRE	MJ, NCV	210.43	210.43	53.25	0.01	0.02	0.00	3.85	0.99	152.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Renewable primary energy used as material	RPRM	MJ, NCV	31.49	31.49	31.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-renewable primary energy used as energy	NRPRE	MJ, NCV	625.57	625.57	91.73	6.52	1.60	0.00	157.48	160.90	205.60	0.00	0.00	0.00	0.00	1.31	0.00	0.42	0.00
Non-renewable primary energy used as material	NRPRM	MJ, NCV	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Secondary Material, Secondary Fuel and Recovered Energy</b>																			
Secondary material	SM	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Renewable secondary fuel	RSF	MJ, NCV	117.62	117.62	39.21	0.00	0.00	0.00	0.00	0.00	78.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-renewable secondary fuel	NRSF	MJ, NCV	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Recovered energy	RE	MJ, NCV	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Mandatory Inventory Parameters</b>																			
Consumption of freshwater resources	FW	m <sup>3</sup>	0.41	0.41	0.01	0.00	0.00	0.00	0.37	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Indicators Describing Waste</b>																			
Hazardous waste disposed	HWD	kg	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-hazardous waste disposed	NHWD	kg	0.38	0.38	0.13	0.00	0.00	0.00	0.00	0.00	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
High-level radioactive waste	HLRW	m <sup>3</sup>	2.5E-08	2.5E-08	3.1E-09	4.8E-11	1.3E-11	0.0E+00	1.4E-08	2.0E-09	6.3E-09	0.0E+00	0.0E+00	0.0E+00	0.0E+00	9.6E-12	0.0E+00	1.7E-11	0.0E+00
Intermediate- and low-level radioactive waste	ILLRW	m <sup>3</sup>	4.9E-07	4.9E-07	1.6E-10	2.3E-10	6.5E-11	0.0E+00	6.5E-08	4.2E-07	1.2E-09	0.0E+00	0.0E+00	0.0E+00	0.0E+00	4.6E-11	0.0E+00	8.1E-11	0.0E+00
Components for re-use	CRU	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Materials for recycling	MR	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Materials for energy recovery	MER	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Recovered energy exported	EE	MJ, NCV	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**Table 3: Cradle-to-Grave Results for 1.0 m<sup>2</sup> of engineered wood flooring – Incineration End-of-Life Treatment**

Core Mandatory Impact Indicator	Indicator	Unit	A-C	A-D	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4, Incineration	D, Incineration
Global warming potential – Total	GWP <sub>TOTAL</sub>	kg CO2e	39.12	17.83	-4.87	0.48	0.15	0.00	12.26	3.28	15.91	0.00	0.00	0.00	0.00	0.10	0.00	11.80	-21.28
Global warming potential - Fossil	GWP <sub>FOSSIL</sub>	kg CO2e	39.12	17.83	6.85	0.48	0.15	0.00	12.26	3.28	15.91	0.00	0.00	0.00	0.00	0.10	0.00	0.08	-21.28
Global warming potential - Biogenic	GWP <sub>BIOGENIC</sub>	kg CO2e	0.00	0.00	-11.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11.72	0.00
Depletion potential of the stratospheric ozone layer	ODP	kg CFC11e	7.4E-06	7.4E-06	1.1E-06	8.1E-10	9.1E-10	0.0E+00	1.6E-06	2.5E-06	2.3E-06	0.0E+00	0.0E+00	0.0E+00	0.0E+00	1.6E-10	0.0E+00	1.3E-12	-4.5E-09
Acidification potential of soil and water sources	AP	kg SO2e	0.25	0.23	0.04	0.00	0.00	0.00	0.09	0.02	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.02
Eutrophication potential	EP	kg Ne	0.21	0.21	0.03	0.00	0.00	0.00	0.03	0.01	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Formation potential of tropospheric ozone	SFP	kg O3e	3.27	2.86	0.71	0.08	0.01	0.00	0.55	0.17	1.71	0.00	0.00	0.00	0.00	0.02	0.00	0.04	-0.40
Abiotic depletion potential (ADP <sub>fossil</sub> )	ADPF	MJ, NCV	493.97	195.12	63.87	6.06	1.48	0.00	123.66	148.22	148.31	0.00	0.00	0.00	0.00	1.22	0.00	1.16	-298.85
Fossil fuel depletion	FFD	MJ Surplus	58.73	9.02	5.91	0.91	0.07	0.00	15.51	21.90	14.24	0.00	0.00	0.00	0.00	0.18	0.00	0.00	-49.71
<b>Use of Primary Resources</b>																			
Renewable primary energy used as energy	RPRE	MJ, NCV	233.28	233.24	53.25	0.01	0.02	0.00	3.85	0.99	152.30	0.00	0.00	0.00	0.00	0.00	0.00	22.86	-0.04
Renewable primary energy used as material	RPRM	MJ, NCV	31.49	31.49	31.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-renewable primary energy used as energy	NRPRE	MJ, NCV	626.35	294.41	91.73	6.52	1.60	0.00	157.48	160.90	205.60	0.00	0.00	0.00	0.00	1.31	0.00	1.21	-331.94
Non-renewable primary energy used as material	NRPRM	MJ, NCV	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Secondary Material, Secondary Fuel and Recovered Energy</b>																			
Secondary material	SM	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Renewable secondary fuel	RSF	MJ, NCV	117.62	117.62	39.21	0.00	0.00	0.00	0.00	0.00	78.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-renewable secondary fuel	NRSF	MJ, NCV	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	RE	MJ, NCV	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Mandatory Inventory Parameters</b>																			
Consumption of freshwater resources	FW	m3	0.41	0.41	0.01	0.00	0.00	0.00	0.37	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Indicators Describing Waste</b>																			
Hazardous waste disposed	HWD	kg	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Non-hazardous waste disposed	NHWD	kg	0.38	0.38	0.13	0.00	0.00	0.00	0.00	0.00	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
High-level radioactive waste	HLRW	m3	2.5E-08	2.5E-08	3.1E-09	4.8E-11	1.3E-11	0.0E+00	1.4E-08	2.0E-09	6.3E-09	0.0E+00	0.0E+00	0.0E+00	0.0E+00	9.6E-12	0.0E+00	0.0E+00	-1.6E-10
Intermediate- and low-level radioactive waste	ILLRW	m3	4.9E-07	4.9E-07	1.6E-10	2.3E-10	6.5E-11	0.0E+00	6.5E-08	4.2E-07	1.2E-09	0.0E+00	0.0E+00	0.0E+00	0.0E+00	4.6E-11	0.0E+00	0.0E+00	-7.8E-10
Components for re-use	CRU	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Materials for recycling	MR	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Materials for energy recovery	MER	kg	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Recovered energy exported	EE	MJ, NCV	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

## LIMITATIONS

### Comparability

Environmental declarations from different programs (ISO 14025) may not be comparable. Comparison of the environmental performance using EPD information shall consider all relevant information modules over the full life cycle of the products within the building.

This PCR allows EPD comparability only when the same functional requirements between products are ensured and the requirements of ISO 21930:2017 §5.5 are met. In addition, to be compared EPDs must comply with the same core and sub-category PCRs (Part A and B) and include all relevant information modules. It should be noted that different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.

### Forest Management

While this EPD does not address landscape level forest management impacts, potential impacts may be addressed through requirements put forth in regional regulatory frameworks, ASTM 7612-15 guidance, and ISO 21930 Section 7.2.11 including notes therein. These documents, combined with this EPD, may provide a more complete picture of environmental and social performance of wood products.

While this EPD does not address all forest management activities that influence forest carbon, wildlife habitat, endangered species, and soil and water quality, these potential impacts may be addressed through other mechanisms such as regulatory frameworks and/or forest certification systems which, combined with this EPD, will give a more complete picture of environmental and social performance of wood products.

### Scope of the EPD

EPDs can complement but cannot replace tools and certifications that are designed to address environmental impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, etc.

### Accuracy of Results

EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact when averaging data.

## REFERENCES

- 1 American Center for Life Cycle Assessment (2019) ACLCA Guidance to Calculating Non-LCIA Inventory Metrics in Accordance with ISO 21930:2017
- 2 Bare, J. (2012) Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI) - Version 2.1.
- 3 Forest Products Laboratory (2021) Life cycle assessment of engineered hardwood flooring in the eastern United States.
- 4 International Organization for Standardization (2006) ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and procedures
- 5 International Organization for Standardization (2006) International Standard ISO 14040:2006 - Life cycle assessment – Principles and framework
- 6 ISO 14044:2006/AMD 1:2017/ AMD 2:2020 Environmental Management – Life cycle assessment – Requirements and guidelines
- 7 International Organization for Standardization (2017) International Standard ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.
- 8 LTS (2019) DataSmart: <http://ltsexperts.com/services/software/datasmart-life-cycle-inventory/>
- 9 National Renewable Energy Laboratory (2019) U.S. Life Cycle Inventory Database <http://www.nrel.gov/lci/>
- 10 PRé Consultants BV (2018) SimaPro v8.5 LCA Software
- 11 UL Environment (2018) Product Category Rule (PCR) Guidance for Building-Related Products and Services, Part A Life Cycle Assessment Calculation Rules and Report Requirements V 3.2.
- 12 UL Environment (2018) Product Category Rule (PCR) Guidance for Building-Related Products and Services, Part B: Flooring EPD Requirements UL 10010-7
- 13 U.S. Department of Transportation, Bureau of Transportation Statistics; and, U.S. Department of Commerce, U.S. Census Bureau. (2020). 2017 Commodity Flow Survey Final Tables. [CF1700A21].
- 14 U.S. Environmental Protection Agency (2019) Advancing Sustainable Materials Management: 2017 Fact Sheet (Table 4 values for Durable Goods).
- 15 Wernet, G., Bauer, C., Steubing, B., Reinhard, J., Moreno-Ruiz, E., & Weidema, B. (2016) The ecoinvent database version 3 (part I): overview and methodology. The International Journal of Life Cycle Assessment, 21, 1218–1230.